



DEPARTMENT OF PUBLIC WORKS
OFFICE OF THE CITY ENGINEER
605 E. End Blvd South
Marshall, Texas 75671
903-935-4489

Project Startup Notice: 2024 Street Improvement Program –Reconstruction\Overlay

Project: 2024 Street Improvement Program –Reconstruction\Overlay

Description: Includes the complete reconstruction (pulverization), paving, striping, and signage upgrades, as necessary, of select distressed City roadways. Expect delays when crews are working on your roadway.

Miles of Roadway in Project Pool: 2.310± miles of Reconstruction and 2.307± in overlay work. Work performed under this program will include some or all of the listed roads with final scope of work to be determined based on bid prices and available funding.

Anticipated Schedule:

Advertisement: March 3 & 10, 2024 - **COMPLETED**

Bid Opening: March 27, 2024 - **COMPLETED**

Award of Contract: April 25, 2024 - **COMPLETED**

Begin Construction: On or about May 30, 2024


Anticipated Completion: September 27, 2024

Funding Sources:

City Street Program\Dedicated Sales Tax

Contact Information:

For more information about this project, please feel free to contact Eric Powell, PE, City Engineer\Director of Public Works at the City of Marshall Public Works Department: 903-935-4489.

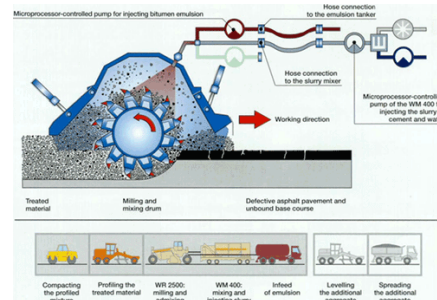

Typical Pulverizing Operations



2024 RECONSTRUCTION\OVERLAY ROADLIST (4.618 MILES)

CITY OF MARSHALL DEPARTMENT OF PUBLIC WORKS ANNUAL STREET IMPROVEMENT PROGRAM										
2024 STREET IMPROVEMENT PROGRAM - Revision 1										

RECONSTRUCTION

PCI Index	ST Prefix	STREET NAME	ST Suffix	FROM	TO	Length	Width (Avg.)	Area	Tonnage	Notes
27		BENITA	DR	POCONO ST	E CAROLANNE BLVD	425	24	1,133	130	
27	E	CAROLANNE	BLVD	S GARRETT ST	S WASHINGTON AVE	1883	40	8,369	962	
27		SPEED	ST	HERNDON ST	END	325	24	867	100	
27	F	TRAVIS	ST	HARPER DR	NEHL ST	2381	30	7,937	913	
28	N	BOLIVAR	ST	SUMMIT ST	VIRGINIA ST	315	24	840	97	
28	E	CAROLANNE	BLVD	BENITA DR	S GARRETT ST	1701	40	7,560	869	
28		COMPRESS	ST	MILL ST	GRAND AVE (HWY 80)	764	24	2,037	234	
28	E	EMORY	ST	MEADOW ST	S WASHINGTON AVE	418	24	1,115	128	Removed due to existence of 2" water main
28		HERBERT	ST	EVANS ST	CAIN ST	617	20	1,371	158	
28		NOLAN	ST	W HOKSTON ST	SPRING ST	1145	21	3,053	351	
40		MAVERICK	DR	JOHNSON ST	E PINECREST DR	2457	22	0	0	Tabled during Council discussion on April 25, 2024
28	E	CROCKETT	ST	DOTY ST	LOH ST	1335	22	3,283	376	
28		DICKSON	ST	N FRANKLIN ST	GEORGE GREGG ST	922	24	2,459	283	
28		ROLLINGWOOD	DR	REDWOOD TRL	JOHN REAGAN ST	388	20	888	99	
								0	0	
								0	0	
Reconstruction Totals:								40,862	4,699	

OVERLAY

PCI Index	ST Prefix	STREET NAME	ST Suffix	FROM	TO	Length	Width (Avg.)	Area	Tonnage	Notes
44		BRIMM	ST	FAIRVIEW ST	BENITA ST	391	24	1,043	115	
44		EVANS	ST	HERNDON ST	RALPH ST	1083	24	2,888	318	
44	S	FRANKLIN	ST	W BOWIE ST	W HOUSTON ST	310	24	827	91	
44		HANKS	ST	SEDBERRY ST	ROBERTSON ST	406	20	902	99	
44		PINE COVE	ST	LYNOAK ST	LAUREL LN	493	22	1,205	133	
44		PITTS	AVE	VICTORY DR (HWY80)	END	1784	20	3,964	436	
45	W	ARGYLE	ST	S WASHINGTON AVE	VALLEJOMA ST	259	20	576	63	
45		BILLUPS	ST	W EMORY ST	ROGERS ST	937	21	2,499	275	
45		BROWN	ST	EVANS ST	NORWOOD ST	1457	21	3,885	427	
45		BRYAN	ST	S MARION ST	MI K BLVD (SL390)	677	20	1,504	165	
45		BUTNA VISTA	CT	BUTNA VISTA CT	END	396	24	1,056	116	
45		CTDAR	ST	ESPLANADE ST	GEORGE GREGG	1492	28	4,642	511	
45	W	CROCKETT	ST	S PULTON ST	S GROVE ST	300	20	667	73	
45		LUDOLPH	ST	DENTON ST	ROSS ST	317	21	845	93	
46		DAVIDGE	DR	GOLDEN OAKS DR	KINGS RD	871	22	2,129	234	
46		FITZGERALD	ST	SHERMAN DR	ENFIELD DR	1,010	30	3,367	370	
Overlay Totals:								14,210	3,520	

NOTES:

- 1 **STREET NAME** Streets that have been removed from the original bid list
- 2 **STREET NAME** Streets that have been added to replace those removed