CITY OF MARSHALL

COMMISSION AGENDA INFORMATION SHEET:

MEETING DATE: January 14, 2016

PROJECT: Consider and act on a request to award a contract for the CDBG funded replacement of approximately 920 linear feet of 6-inch water line on Spring Street. (Public Services Director)

DESCRIPTION:
This project involves the replacement of an old corroded and leaking water line segment on Spring Street, running approximately 610 linear feet from Sanford Street, eastward toward Smith Park, then approximately 310 linear feet southward, where it shall be looped back into an existing water line on Alvin Street. Construction of this project is made possible through our federal Community Development Block Grant (CDBG) funding program.

Bids were opened on Wednesday, December 16, 2015, and we received responses from eight (8) qualified contractors, with the following results:

*Please reference attached Bid Tabulation.

Low bidder is Haltom Construction of Marshall, Texas at $84,370.00.

COST:
Lowest qualified bidder at $84,370.00

FUNDING:	**Acct. Name & No**	**Original Budget**
	2015 CDBG Funds	$100,000.00

RECOMMENDED CITY COMMISSION ACTION:
Consider approval of a construction contract with Haltom Construction of Marshall, Texas, at a cost of $84,370.00 to replace approximately 620 linear feet of 6-inch water line on Spring Street, funded through our CDBG program.

CITY CONTACT: J. C. Hughes, Public Services Director - 903-503-4503

ATTACHMENTS:
Spring Street Water Line – 6-inch line location
Spring Street Water Line Replacement – Bid Tabulation

cc: Wes Morrison, Planning & Zoning Director
Chris Miles, Water & Sewer Superintendent

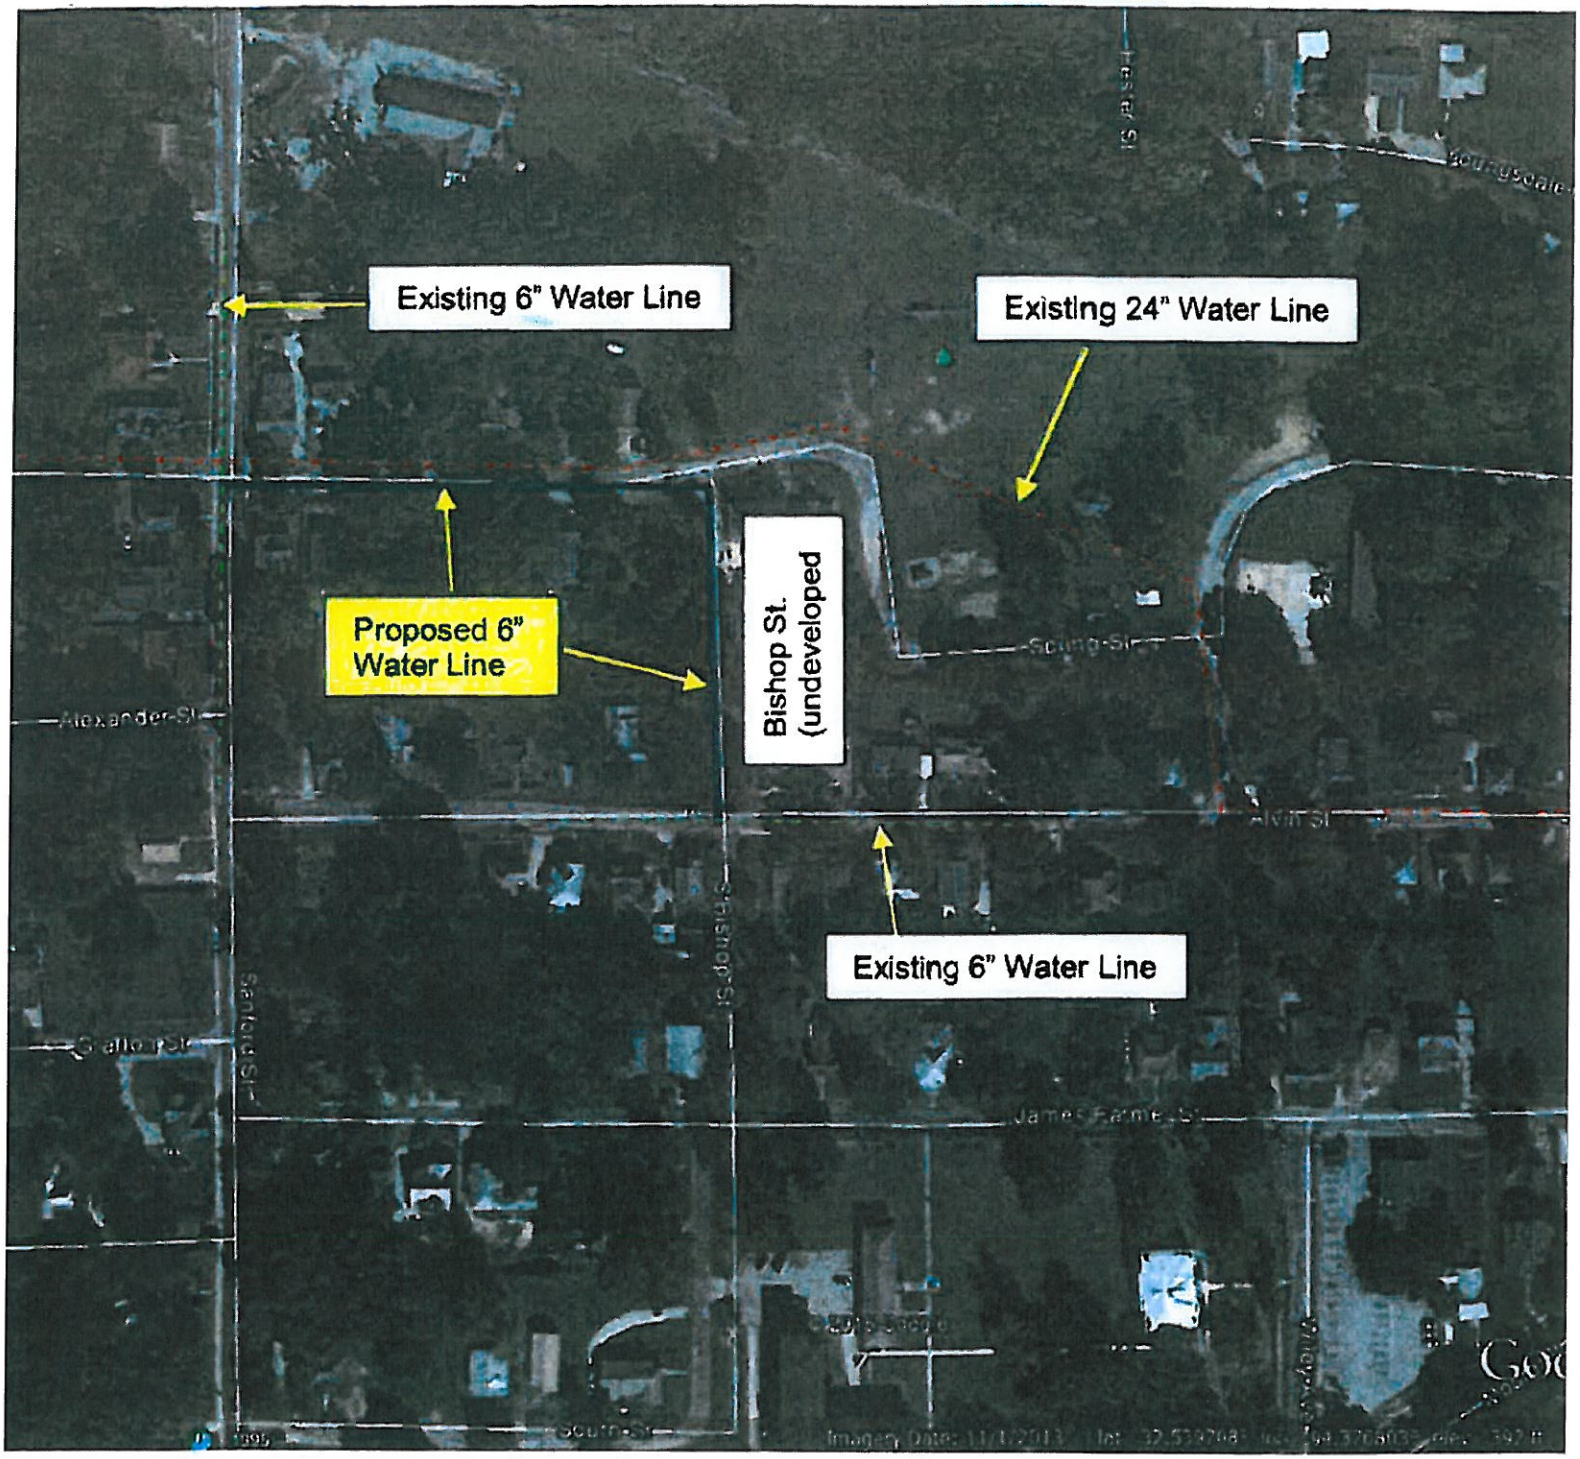

SPRING STREET 6" WATER LINE
CDBG FUNDED – 919 FEET

STOKES & ASSOCIATES, INC.
CONSULTANT ENGINEERS

City of Marshall
Spring Street Water Improvements
Bid Tabulation - December 16, 2015
Project Number 695-1519

Item	Quan.		Description	*Haltom Construction*		*J W Burgess, Inc.*		*7-H Construction*	
				Unit	Total	Unit	Total	Unit	Total
1	610	LF	6" Ø AWWA C-909 PC150 Water Pipe	22.50	13,725.00	30.00	18,300.00	26.50	16,165.00
2	309	LF	6" Ø AWWA C-900 DR 18 Restrained Joint PVC Pipe	42.50	13,132.50	50.00	15,450.00	59.00	18,231.00
3	0.25	TN	Ductile Iron Fittings	10,000.00	2,500.00	6,000.00	1,500.00	5,500.00	1,375.00
4	4	EA	6" MJ Gate Valve	1,250.00	5,000.00	900.00	3,600.00	1,092.00	4,368.00
5	2	EA	6" Tapping Sleeve and Valve	2,250.00	4,500.00	1,500.00	3,000.00	2,772.00	5,544.00
6	6	EA	Long Side Water Service	1,150.00	6,900.00	1,600.00	9,600.00	1,162.00	6,972.00
7	6	EA	Short Side Water Service	650.00	3,900.00	600.00	3,600.00	745.00	4,470.00
8	1	EA	Fire Hydrant Assembly	4,250.00	4,250.00	4,000.00	4,000.00	4,657.00	4,657.00
9	1	LS	Abandonment of Existing Water Main	2,900.00	2,900.00	2,000.00	2,000.00	850.00	850.00
10	485	LF	Pavement Repair	37.50	18,187.50	50.00	24,250.00	77.00	37,345.00
11	11	SY	Rock Rip-Rap	175.00	1,925.00	100.00	1,100.00	227.00	2,497.00
12	1	LS	Right-of-Way Preparation	2,250.00	2,250.00	2,000.00	2,000.00	4,280.00	4,280.00
13	1	LS	Traffic Control	3,500.00	3,500.00	2,000.00	2,000.00	535.00	535.00
14	1	LS	Trench Safety System	500.00	500.00	500.00	500.00	375.00	375.00
15	1	LS	Project Sign	1,200.00	1,200.00	1,000.00	1,000.00	80.00	80.00
			Total Bid		**$84,370.00**		**$91,900.00**		**$107,744.00**

STOKES & ASSOCIATES, INC.
CONSULTANT ENGINEERS

City of Marshall
Spring Street Water Improvements
Bid Tabulation - December 16, 2015
Project Number 695-1519

Item	Quan.		Description	*David Lawler Construction*		*AAA Sanitation*		*McKinney & Moore*	
				Unit	Total	Unit	Total	Unit	Total
1	610	LF	6" Ø AWWA C-909 PC150 Water Pipe	25.00	15,250.00	33.00	20,130.00	39.00	23,790.00
2	309	LF	6" Ø AWWA C-900 DR 18 Restrained Joint PVC Pipe	50.00	15,450.00	60.00	18,540.00	78.00	24,102.00
3	0.25	TN	Ductile Iron Fittings	2,000.00	500.00	4,500.00	1,125.00	6,000.00	1,500.00
4	4	EA	6" MJ Gate Valve	1,200.00	4,800.00	1,100.00	4,400.00	1,100.00	4,400.00
5	2	EA	6" Tapping Sleeve and Valve	2,500.00	5,000.00	2,300.00	4,600.00	2,600.00	5,200.00
6	6	EA	Long Side Water Service	800.00	4,800.00	1,200.00	7,200.00	1,300.00	7,800.00
7	6	EA	Short Side Water Service	400.00	2,400.00	650.00	3,900.00	700.00	4,200.00
8	1	EA	Fire Hydrant Assembly	3,500.00	3,500.00	3,750.00	3,750.00	4,100.00	4,100.00
9	1	LS	Abandonment of Existing Water Main	5,000.00	5,000.00	2,000.00	2,000.00	3,000.00	3,000.00
10	485	LF	Pavement Repair	80.00	38,800.00	70.00	33,950.00	52.00	25,220.00
11	11	SY	Rock Rip-Rap	100.00	1,100.00	250.00	2,750.00	350.00	3,850.00
12	1	LS	Right-of-Way Preparation	2,500.00	2,500.00	4,000.00	4,000.00	2,200.00	2,200.00
13	1	LS	Traffic Control	7,500.00	7,500.00	3,000.00	3,000.00	2,000.00	2,000.00
14	1	LS	Trench Safety System	1,000.00	1,000.00	100.00	100.00	1,100.00	1,100.00
15	1	LS	Project Sign	1,500.00	1,500.00	1,500.00	1,500.00	2,000.00	2,000.00
			Total Bid		**$109,100.00**		**$110,945.00**		**$114,462.00**

STOKES & ASSOCIATES, INC.
CONSULTANT ENGINEERS

City of Marshall
Spring Street Water Improvements
Bid Tabulation - December 16, 2015
Project Number 695-1519

Item	Quan.		Description	*John Wright Construction*		*Duplichain Contractors*	
				Unit	Total	Unit	Total
1	610	LF	6" Ø AWWA C-909 PC150 Water Pipe	30.00	18,300.00	62.00	37,820.00
2	309	LF	6" Ø AWWA C-900 DR 18 Restrained Joint PVC Pipe	44.00	13,596.00	70.00	21,630.00
3	0.25	TN	Ductile Iron Fittings	7,200.00	1,800.00	6,000.00	1,500.00
4	4	EA	6" MJ Gate Valve	2,200.00	8,800.00	1,600.00	6,400.00
5	2	EA	6" Tapping Sleeve and Valve	3,500.00	7,000.00	3,000.00	6,000.00
6	6	EA	Long Side Water Service	1,800.00	10,800.00	2,000.00	12,000.00
7	6	EA	Short Side Water Service	700.00	4,200.00	800.00	4,800.00
8	1	EA	Fire Hydrant Assembly	7,200.00	7,200.00	4,000.00	4,000.00
9	1	LS	Abandonment of Existing Water Main	1,500.00	1,500.00	3,000.00	3,000.00
10	485	LF	Pavement Repair	26.00	12,610.00	40.00	19,400.00
11	11	SY	Rock Rip-Rap	500.00	5,500.00	150.00	1,650.00
12	1	LS	Right-of-Way Preparation	10,000.00	10,000.00	4,000.00	4,000.00
13	1	LS	Traffic Control	9,000.00	9,000.00	5,000.00	5,000.00
14	1	LS	Trench Safety System	4,000.00	4,000.00	100.00	100.00
15	1	LS	Project Sign	3,500.00	3,500.00	500.00	500.00
			Total Bid		**$117,806.00**		**$127,800.00**